


Select	Motor Brand
☐	Panasonic
☐	Mitsubishi
☐	Yaskawa
☐	HCFA
☐	Delta
☐	Inovance

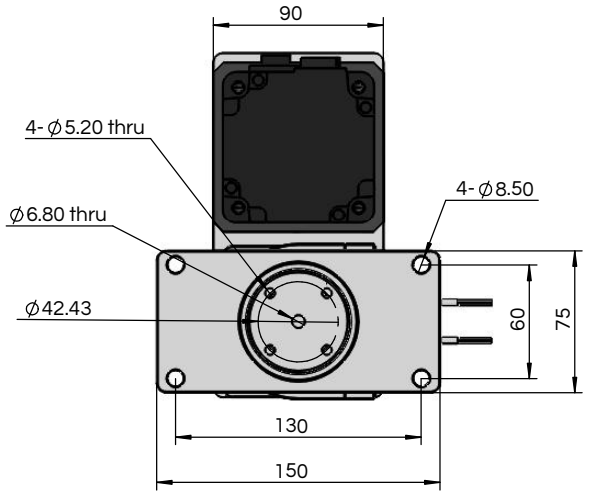


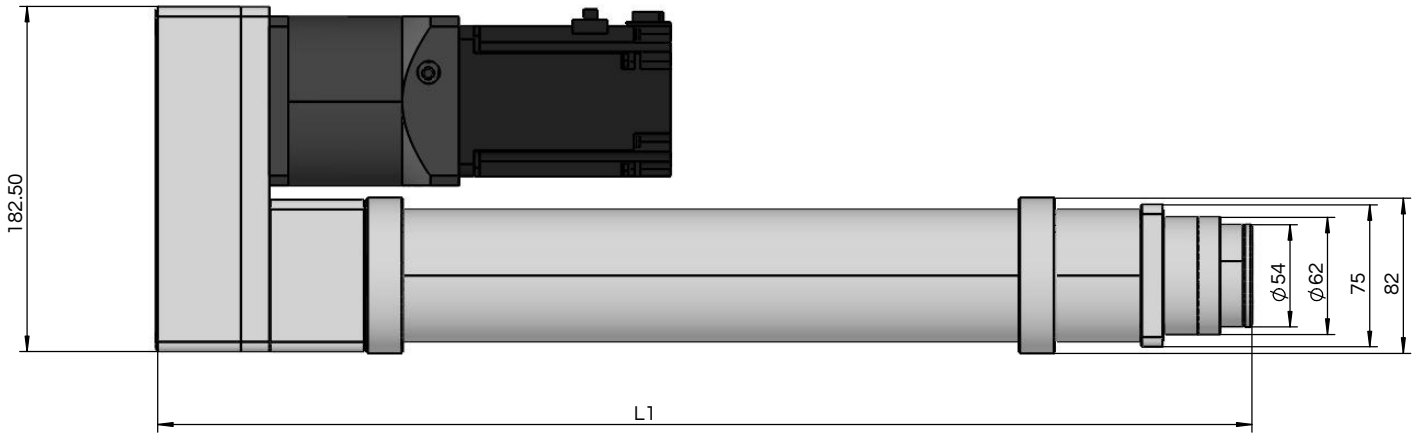

Sensor layout

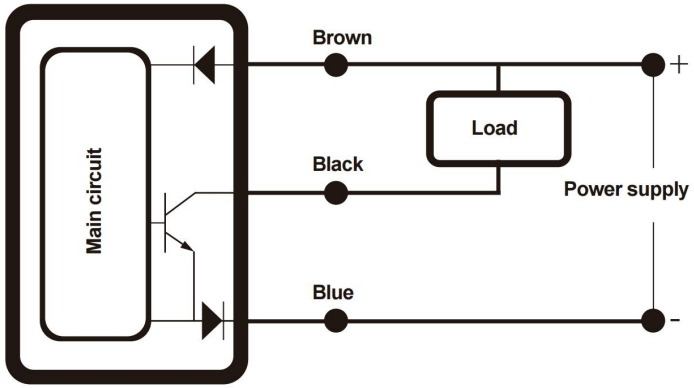

Size diagram of proximity switch

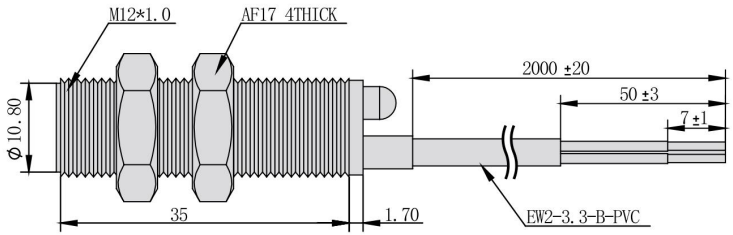

Select	Motor Power (W)	Ball Screw Lead (mm)	Gearbox Ratio	Speed (mm/s)	Thrust (kN)
☐	750	10	-	500	1.275
☐	750	10	5	100	6.375

Specification	Value
Repeated accuracy (mm)	±0.02
Rated speed of motor (RPM)	3000
Valid stroke (mm)	10~2000
Retracted Length L1(mm)	579
Cylinder Body Material	Q235
Number of Stages	3-stage
Sensor	Proximity Switch
Ball Screw Type	C7 Rolled (Standard)☐ C5 Ground ☐

TPA 玖钧传动 Motion Control

SCALE	UNIT		Model	EQR-70-MR-FA		
1:X	mm		Desc	Electric Cylinder		
GENERAL TOLERANCE			Surface	Silver anodized	DRN	Tang
Up to 6	6 30	30 120	120 300	300 600	DWG.NO	C070Q056	CHK	Xu
±0.1	±0.2	±0.3	±0.4	±0.5	Sheet	1-1	APPD	Le

TPA Motion Control International Co., Limited DATE 17-Jul-26