

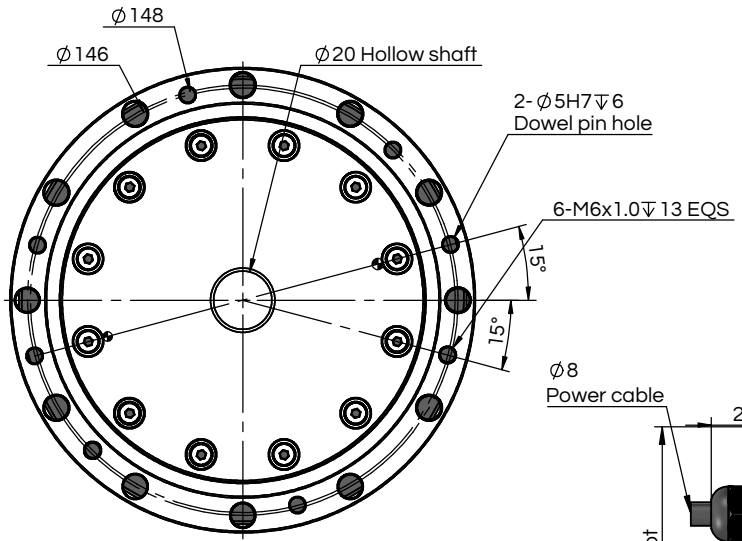


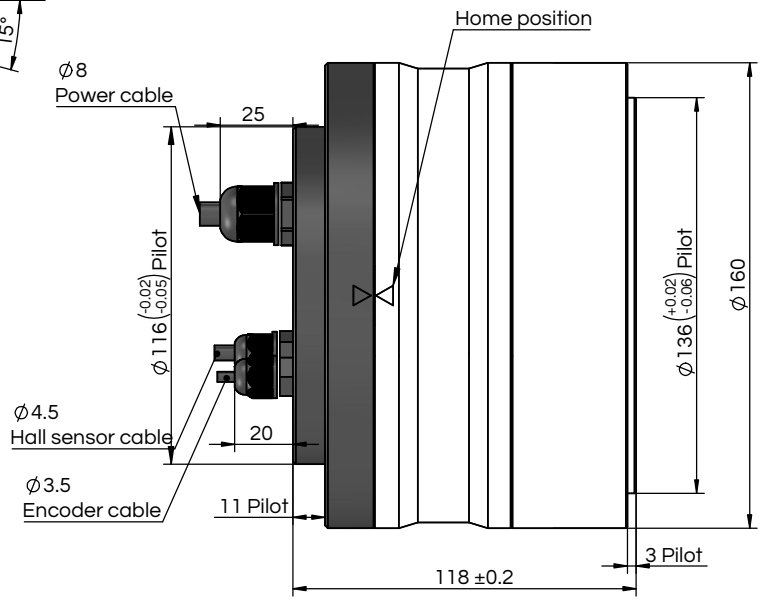

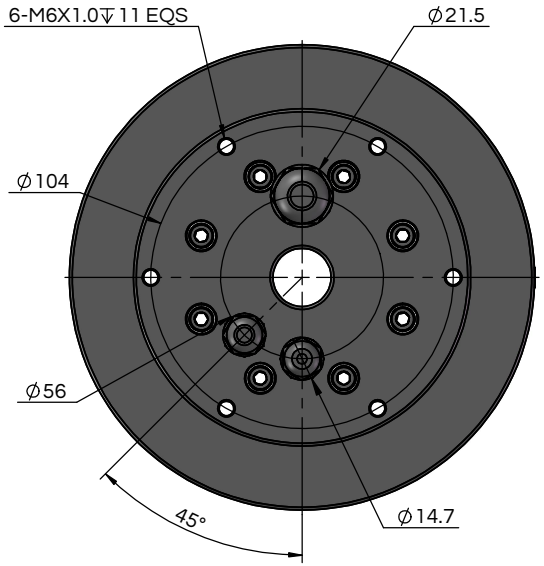

No.	Specification	Unit	Value
1	Flange-type	-	-
2	Continuous Torque	Nm	22
3	Peak Torque	Nm	65
4	Rated Speed	Rpm	150
5	Maximum Speed	Rpm	200
6	Continuous Current	Arms	2.8
7	Peak Current	Arms	8.4
8	Torque Constant	Nm/Arms	7.8
9	Back EMF Constant*	Vrms/rad/s	4.8
10	Resistance Phase to Phase at 25°C	Ω	13.2
11	Inductance Phase to Phase at 25°C	mH	24.1
12	Number of poles	-	22
13	Rotor Inertia	$kg{\cdot}m^2$	0.0187
14	Incremental encoder resolution	ppr	1800000
15	Absolute encoder resolution	ppr	24 bit (16777216)
16	Absolute Position Accuracy	arcsec	±15
17	Repeat Position Accuracy	arcsec	±2
18	Axial Load	N	16000
19	Radial Load	Nm	130
20	Axial Run Out*2	um	20/5/3
21	Radial Run Out*3	um	20/5/3
22	Mass	kg	9.7
23	IP level	-	40
24	Motor Color	-	black
25	Max. DC BUS	V	220

*1 The back electromotive force (back EMF) is the value measured between any two conductors when the motor is running at a constant speed.
*2 *3 Please contact sales.

NOTE:
1.Please make sure the flatness of customer's surface when mounting the motor must be within 0.01/300 mm.
2.The mounting surface without black oxidation.

Wiring Definition	Installation Instructions	Maintenance Instructions

ITEM	DATE	MODIFIED	DESCRIPTION	APPD

TKOOLLE MOTION CONTROL	SCALE	1:X	UNIT	mm			Model	TDE-160118					
							Desc	Rotary Motor					
	GENERAL TOLERANCE						Surface	Black oxidation		DRN	Tang		
	Up to 6	6 to 30	30 to 120	120 to 300	300 to 600		DWG.NO	M160A041		CHK	Zhou		
	±0.1	±0.2	±0.3	±0.4	±0.5		Sheet	1-1		APPD	Le		
TKOOLLE MOTION CONTROL INTERNATIONAL CO.,LIMITED							DATE	17-Jul-25					