


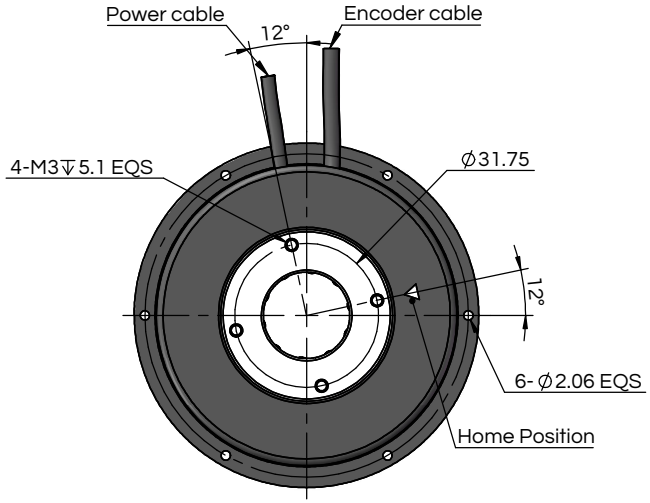


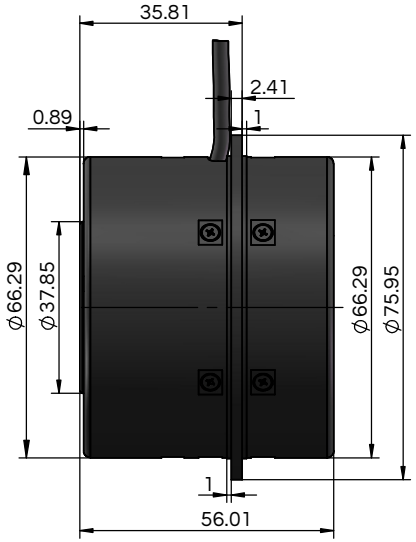

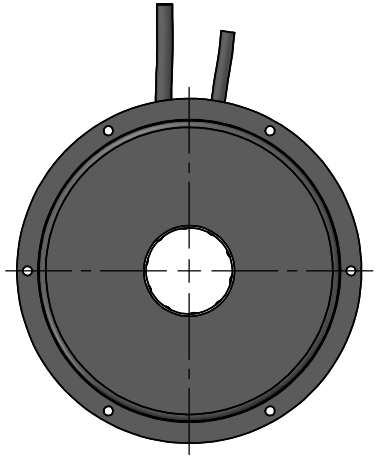

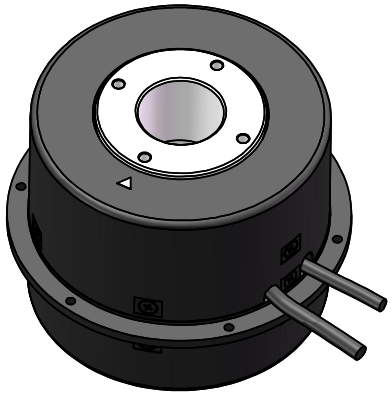

No.	Specification	Unit	Value
1	Flange-type	-	√
2	Continuous Torque	Nm	0.28
3	Peak Torque	Nm	1.1
4	Rated Speed	Rpm	600
5	Maximum Speed	Rpm	900
6	Continuous Current	Arms	1.6
7	Peak Current	Arms	6.4
8	Torque Constant	Nm/Arms	0.18
9	Back EMF Constant*	Vrms/rad/s	0.12
10	Resistance Phase to Phase at 25°C	Ω	4.1
11	Inductance Phase to Phase at 25°C	mH	3.2
12	Number of poles	-	20
13	Rotor Inertia	$kg{\cdot}m^2$	0.000045
14	Incremental encoder resolution	ppr	720000
15	Absolute encoder resolution	ppr	24 bit (16777216)
16	Absolute Position Accuracy	arcsec	±50
17	Repeat Position Accuracy	arcsec	±5
18	Axial Load	N	1200
19	Radial Load	Nm	8
20	Axial Run Out*2	um	20/5
21	Radial Run Out*3	um	20
22	Mass	kg	0.8
23	IP level	-	40
24	Motor Color	-	black
25	Max. DC BUS	V	220

*1 The back electromotive force (back EMF) is the value measured between any two conductors when the motor is running at a constant speed.
*2 *3 Please contact sales.

NOTE:
1.Please make sure the flatness of customer's surface when mounting the motor must be within 0.01/300 mm.
2.The mounting surface without black oxidation.

Wiring Definition	Installation Instructions	Maintenance Instructions

ITEM	DATE	MODIFIED	DESCRIPTION	APPD

TKOOLLE MOTION CONTROL	SCALE	1:X	UNIT	mm			Model	TDI-065056			
							Desc	Rotary Motor			
	GENERAL TOLERANCE						Surface	Black oxidation	DRN	Tang	
	Up to 6	6 to 30	30 to 120	120 to 300	300 to 600		DWG.NO	M065A007	CHK	Zhou	
	±0.1	±0.2	±0.3	±0.4	±0.5		Sheet	1-1	APPD	Le	
TKOOLLE MOTION CONTROL INTERNATIONAL CO.,LIMITED							DATE	17-Jul-25			