

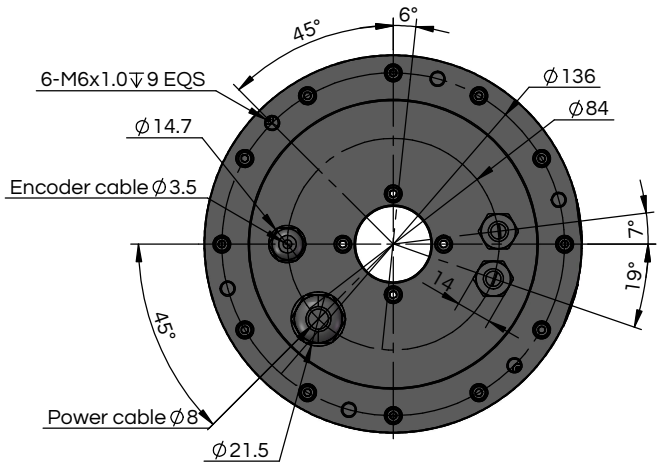


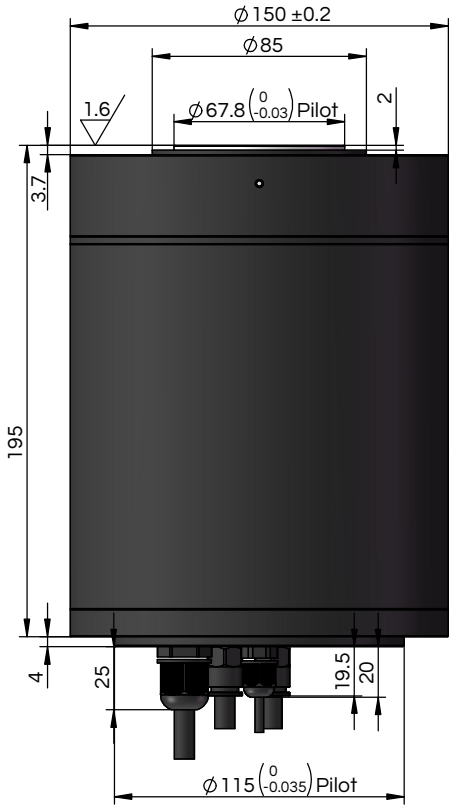

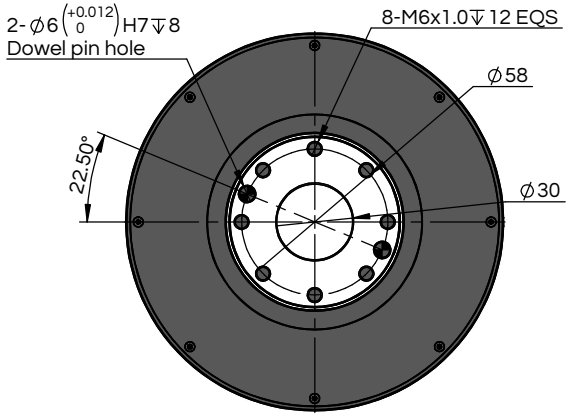

No.	Specification	Unit	Value
1	Continuous Torque	Nm	35(42)
2	Peak Torque	Nm	99(119)
3	Rated Speed	Rpm	330
4	Maximum Speed	Rpm	340
5	Continuous Current	Arms	8(9.6)
6	Peak Current	Arms	24(28.8)
7	Torque Constant	Nm/Arms	4.4
8	Back EMF Constant*	Vrms/rad/s	2.7
9	Resistance Phase to Phase at 25°C	Ω	2.4
10	Inductance Phase to Phase at 25°C	mH	11
11	Number of poles	-	20
12	Rotor Inertia	$kg{\cdot}m^2$	0.0041
13	Incremental encoder resolution	ppr	3480000
14	Absolute encoder resolution	ppr	24bit (16777216)
15	Absolute Position Accuracy	arcsec	±15
16	Repeat Position Accuracy	arcsec	±2
17	Axial Load	N	9000
18	Radial Load	Nm	50
19	Axial Run Out*2	um	5/3
20	Radial Run Out*3	um	5/3
21	Minimum pressure	Mpa	0.5
22	Mass	kg	14.5
23	IP level	-	40
24	Motor Color	-	black
25	Max. DC BUS	V	220

*1 The back electromotive force (back EMF) is the value measured between any two conductors when the motor is running at a constant speed.
*2 *3 Please contact sales.

NOTE:
1.Please make sure the flatness of customer's surface when mounting the motor must be within 0.01/300 mm.
2.The mounting surface without black oxidation.

Wiring Definition	Installation Instructions	Maintenance Instructions

ITEM	DATE	MODIFIED	DESCRIPTION	APPD

TKOOLLE MOTION CONTROL

SCALE	UNIT	Model	TDI-150195-P		
1:X	mm	Desc	Rotary Motor		
GENERAL TOLERANCE		Surface	Black oxidation	DRN	Tang
Up to 6 / 6 to 30 / 30 to 120 / 120 to 300 / 300 to 600		DWG.NO	M150A030	CHK	Zhou
±0.1 / ±0.2 / ±0.3 / ±0.4 / ±0.5		Sheet	1-1	APPD	Le

TKOOLLE MOTION CONTROL INTERNATIONAL CO.,LIMITED DATE 17-Jul-25