


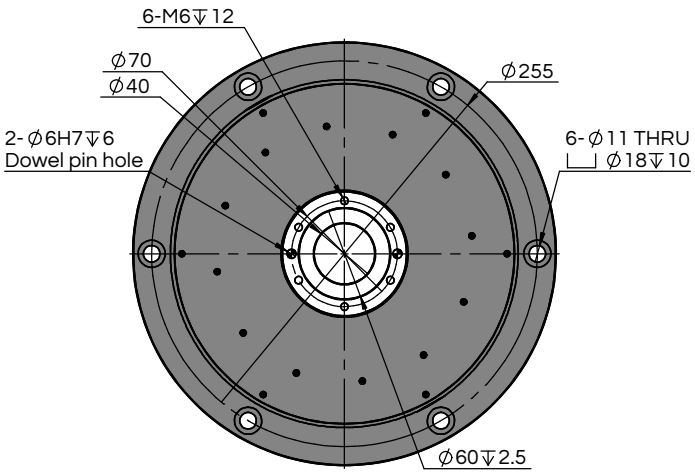


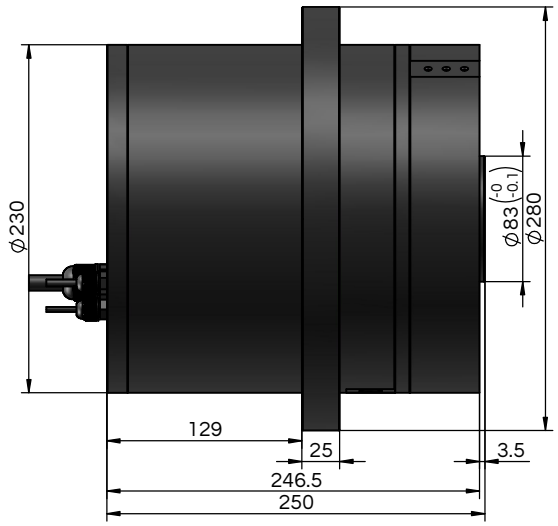

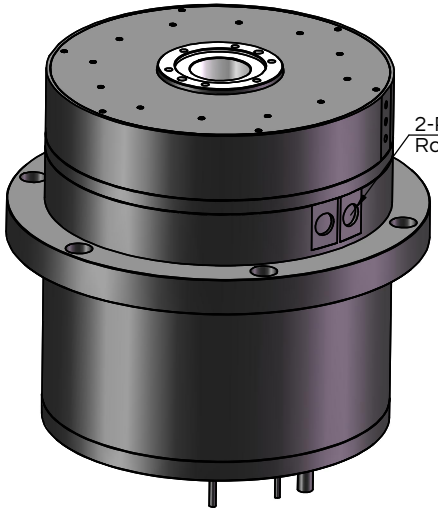

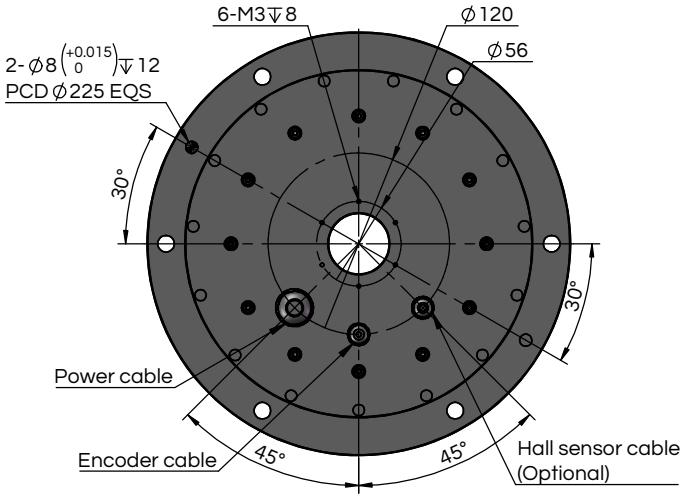

No.	Specification	Unit	Value
1	Flange-type	-	-
2	Continuous Torque	Nm	156
3	Peak Torque	Nm	345
4	Rated Speed	Rpm	300
5	Maximum Speed	Rpm	360
6	Continuous Current	Arms	21
7	Peak Current	Arms	63
8	Torque Constant	Nm/Arms	7.1
9	Back EMF Constant*	Vrms/rad/s	6.4
10	Resistance Phase to Phase at 25°C	Ω	2.6
11	Inductance Phase to Phase at 25°C	mH	8.8
12	Number of poles	-	30
13	Rotor Inertia	$kg{\cdot}m^2$	0.0163
14	Incremental encoder resolution	ppr	2227200
15	Absolute encoder resolution	ppr	24bit (16777216)
16	Absolute Position Accuracy	arcsec	±15
17	Repeat Position Accuracy	arcsec	±2
18	Temperature sensor	-	KTY84
19	Axial Load	N	16000
20	Radial Load	Nm	130
21	Axial Run Out*2	um	5(optional)
22	Radial Run Out*3	um	5(optional)
23	Minimum Flow Water	L/min	12
24	Mass	kg	40
25	IP level	-	40
26	Motor Color	-	black
27	Max. DC BUS	V	380

*1 The back electromotive force (back EMF) is the value measured between any two conductors when the motor is running at a constant speed.
*2 *3 Please contact sales.

NOTE:
1.Please make sure the flatness of customer's surface when mounting the motor must be within 0.01/300 mm.
2.The mounting surface without black oxidation.

Wiring Definition	Installation Instructions	Maintenance Instructions

ITEM	DATE	MODIFIED	DESCRIPTION	APPD

TKOOLLE MOTION CONTROL	SCALE	1:X	UNIT	mm		Model	TDI-230250-W		
						Desc	Rotary Motor		
	GENERAL TOLERANCE					Surface	Black oxidation	DRN	Tang
	Up to 6	6 to 30	30 to 120	120 to 300	300 to 600	DWG.NO	M230A072	CHK	Zhou
	±0.1	±0.2	±0.3	±0.4	±0.5	Sheet	1-1	APPD	Le
TKOOLLE MOTION CONTROL INTERNATIONAL CO.,LIMITED						DATE	17-Jul-25		