


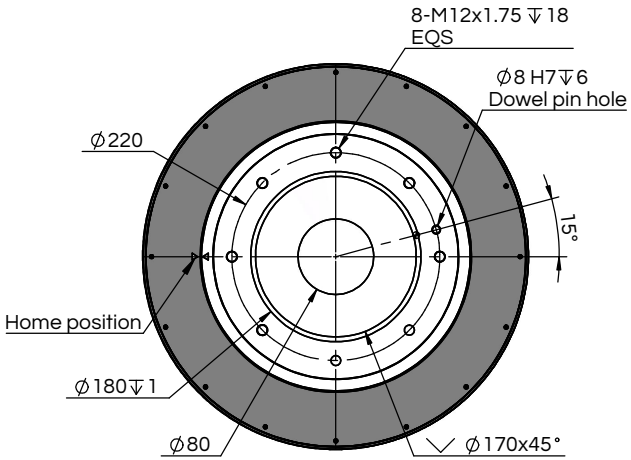


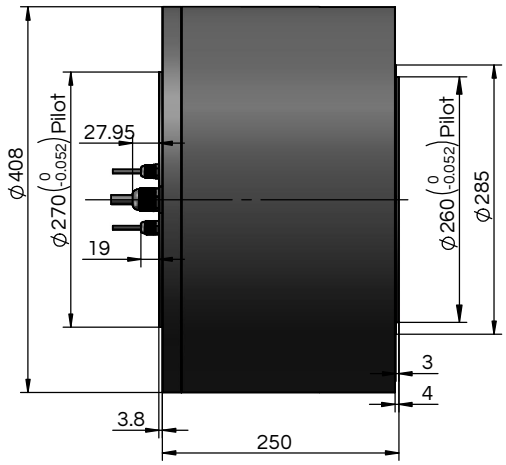

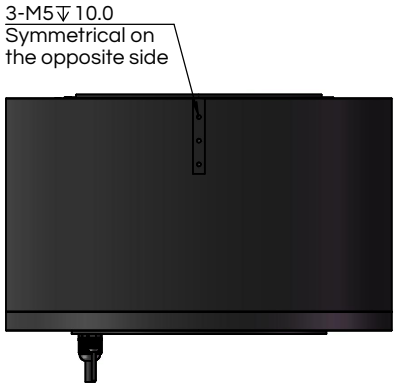

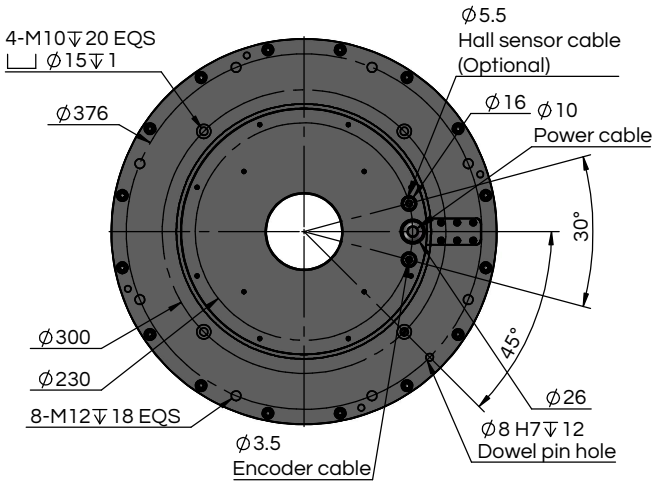

NOTE:
1.Please make sure the flatness of customer's surface when mounting the motor must be within 0.01/300 mm.
2.The mounting surface without black oxidation.

Wiring Definition	Installation Instructions	Maintenance Instructions

No.	Specification	Unit	Value
1	Flange-type	-	-
2	Continuous Torque	Nm	702
3	Peak Torque	Nm	2067
4	Rated Speed	Rpm	60
5	Maximum Speed	Rpm	100
6	Continuous Current	Arms	20
7	Peak Current	Arms	60
8	Torque Constant	Nm/Arms	35.1
9	Back EMF Constant*	Vrms/rad/s	22.8
10	Resistance Phase to Phase at 25°C	Ω	2.4
11	Inductance Phase to Phase at 25°C	mH	7.3
12	Number of poles	-	80
13	Rotor Inertia	$kg{\cdot}m^2$	0.826
14	Incremental encoder resolution	ppr	4350000
15	Absolute encoder resolution	ppr	24bit
16	Absolute Position Accuracy	arcsec	±15
17	Repeat Position Accuracy	arcsec	±2
18	Axial Load	N	42000
19	Radial Load	Nm	500
20	Axial Run Out*2	um	20/5
21	Radial Run Out*3	um	20/5
22	Mass	kg	119
23	IP level	-	40
24	Motor Color	-	black
25	Max. DC BUS	V	380

*1 The back electromotive force (back EMF) is the value measured between any two conductors when the motor is running at a constant speed.
*2 *3 Please contact sales.

ITEM	DATE	MODIFIED	DESCRIPTION	APPD

TKOOLLE MOTION CONTROL

SCALE	UNIT	Model	TDI-400250		
1:X	mm	Desc	Rotary Motor		
GENERAL TOLERANCE		Surface	Black oxidation	DRN	Tang
Up to 6 / 6–30 / 30–120 / 120–300 / 300–600		DWG.NO	M400A125	CHK	Zhou
±0.1	±0.2 / ±0.3 / ±0.4 / ±0.5	Sheet	1-1	APPD	Le

TKOOLLE MOTION CONTROL INTERNATIONAL CO.,LIMITED DATE 17-Jul-25